


# YB-500C(LED)

## Fail secure sturdiness electric bolt with cylinder

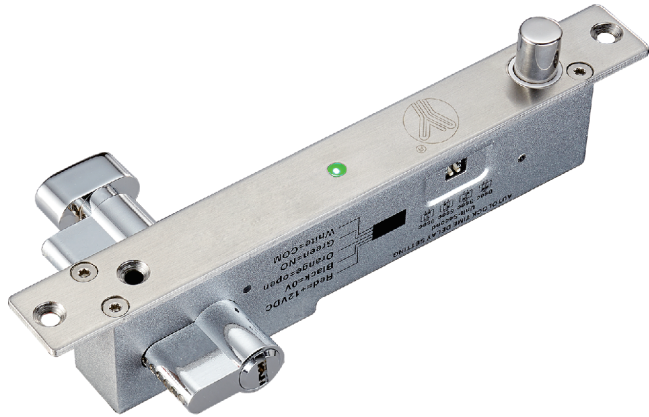


### Product overview

YB-500C (LED) is an all-metal construction electric bolt with European-type cylinder and has both electric control and manual control functions. The 304 stainless steel solid bolt has 1000kg holding force and with anti-burglar design. And this lock can also be used at the temperature of 60 or 20 below zero based on the all-metal components. With the multiple designs of durable solenoid valve, special photoelectric control system, ultra-low temperature and power consumption design, vandal resistant circuitry and auto-detective circuitry, YB-500C (LED) is suitable for narrow frame doors, metal doors, wooden doors, glass doors, PVC doors, partition doors.


### Dimensions

Unit mm

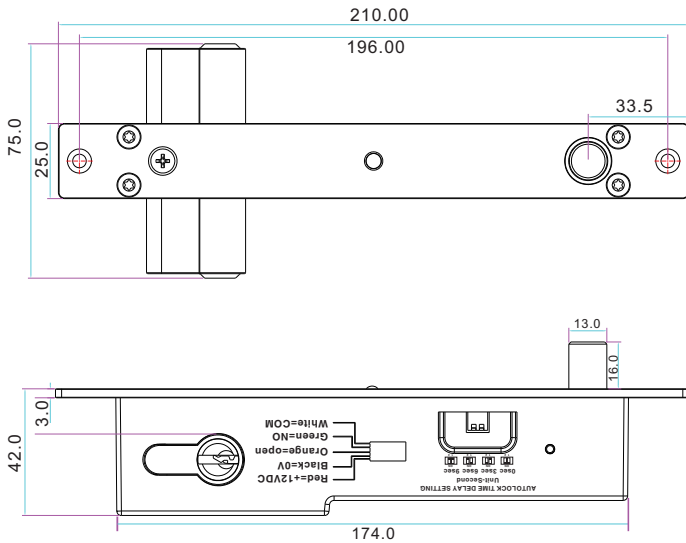


Parameter Model	YB-500C(LED)
Parameter	Description
Fail secure	locked when energized
Dimensions	210Lx25WX42H(mm)
Strike	90Lx25Wx3H(mm)
Bolt	16mmDIA, 304 stainless steel 16mm throw
Optional cylinder	75mm(Single side cylinder can be customized )
Voltage	12VDC
Start current	960mA
Standby current	180mA
Bolt strength	304 stainless steel with polishing finish,1000kg holding force
Time delay	0/3/6/9sec
Signal output	NO、COM
LED	Light on indicates locked; Light off indicates unlocked
Induction distance	Within 8mm
Suitable for	Wooden door, Heavy door, metal door
Face place material	304 stainless steel panel with wiredrawing finish
Weight	1.0kg

### Installation dimension

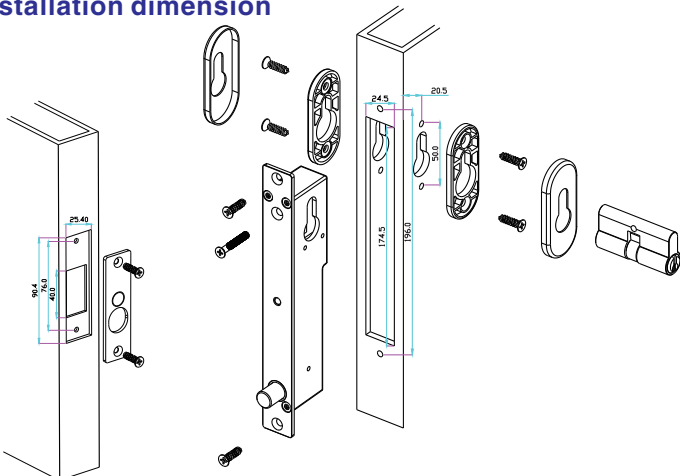


### Installation diagram

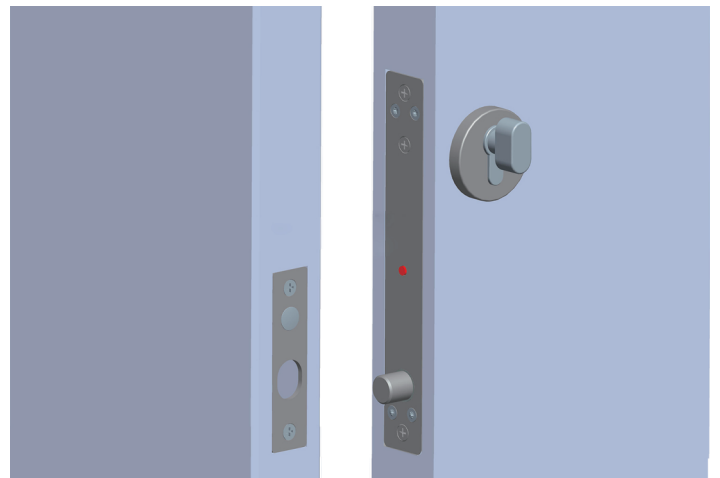




## Suitable for double action doors

Electric bolts are specially designed for double action doors. They can also be installed on both inswing doors and outswing doors.


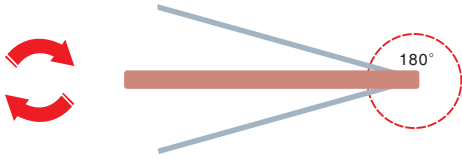


## Optional cylinder



Single side or both-side cylinder is available. Other size of cylinders can be customized, 80/90/100/110/120mm.

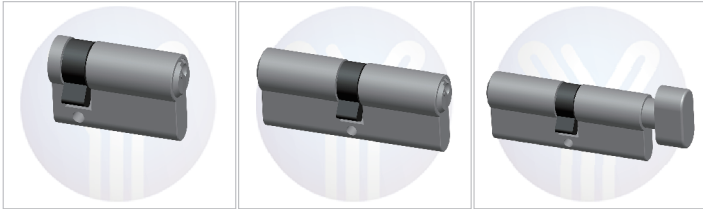

Single side cylinder



Both-side cylinder

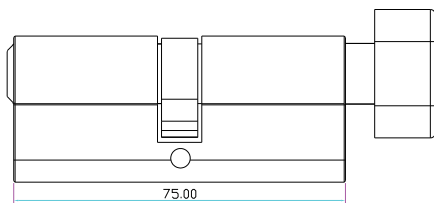

Single side cylinder with thumb turn (standard option)


## Auto-lock time delay function

This can be set up from 0 to 9 seconds by adjusting the jumpers.




## Optional accessory

The door loop is used for protection of extension wiring from damages for security reasons. (Optional models: DLK-401/402/403)

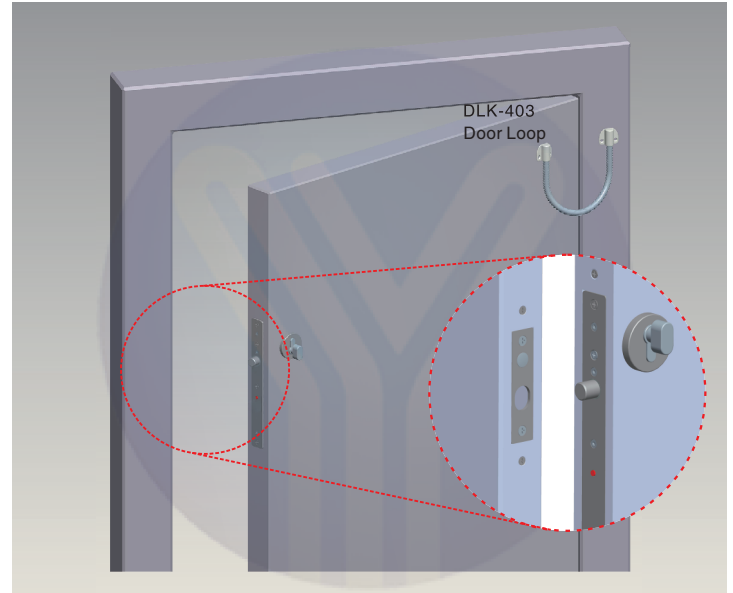


## Auto-detective circuitry

This special auto-detective circuit of electric bolt keeps the bolt retracted while the door unlocked or improperly aligned until the door is properly closed.

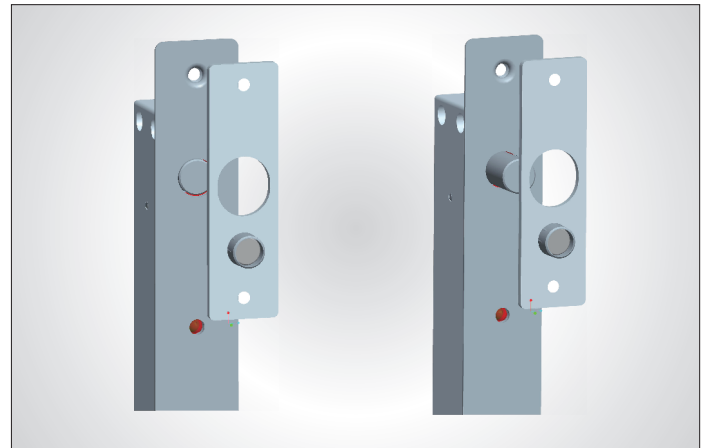


## Vandal resistant circuitry

The reed sensor will automatically disconnect when the door is actually closed in order to enhance the security of the lock.

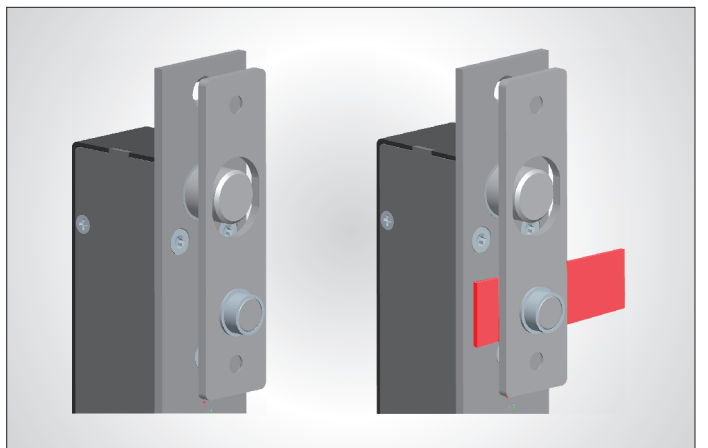


## Photoelectric sensor control

Instead of using electric components, we use photoelectric components to make the bolt more stable and durable. At the same time, it can increase the lifetime of the electric bolt.

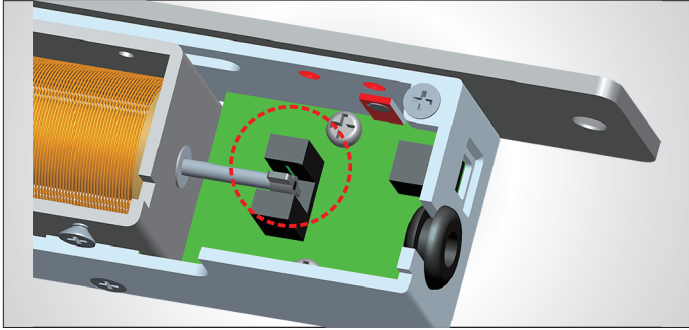


## Ultra durable solenoid valve

Tested for over 500,000 times, the specially designed solenoid valve can be used for 5 to 10 years.

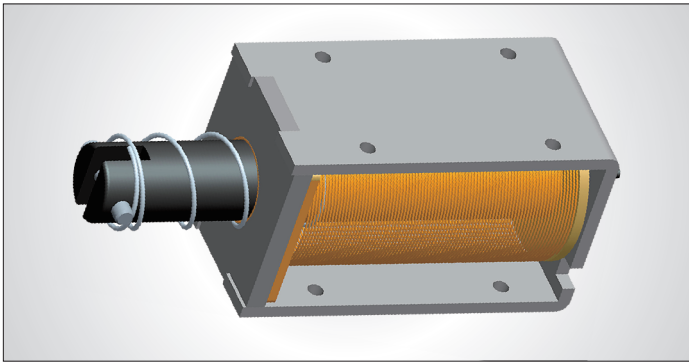

## All-metal lock body

The all-metal lock body and components make the lock stronger and more durable, which ensure the lock can work under the harsh environment. (Can order the lock work at the temperature of 60 or 40 below zero.)

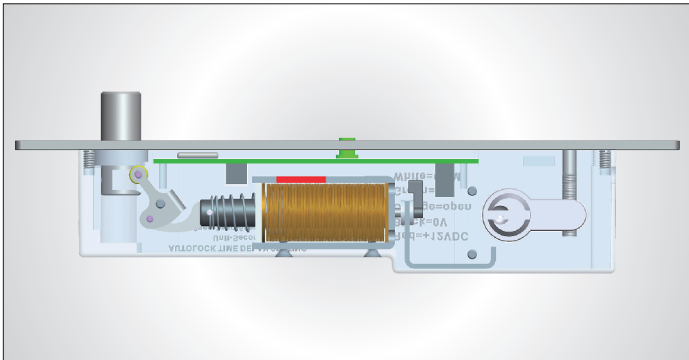

## Connecting instructions

With the special auto-detective circuit, we advise you to connect our own open wires to open the door instead of shutting off the power directly.

■	Red	+	12VDC	
■	Black	-		} Control device
■	Orange	OPEN		
■	Blue	NO		
■	Gray	COM		} Lock signal output


## Optional door or lock sensor output

Standard option is a set of NO/COM lock signal output contact.




## Optional anti-burglar function

When the bolt is extended, it cannot be retracted by the external force without permission.

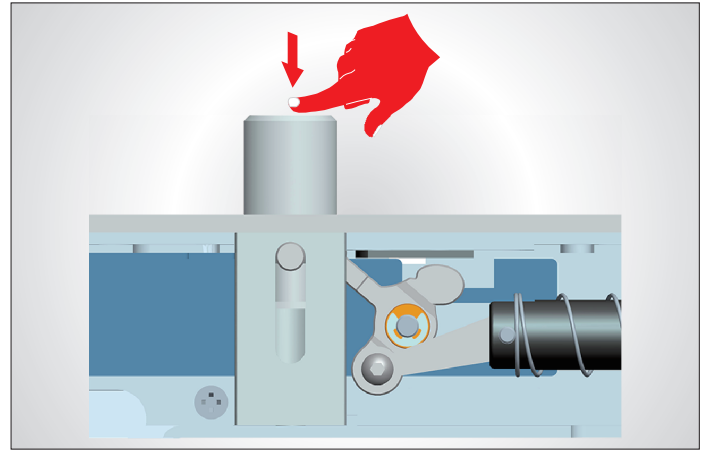

## Energy saving design

When the bolt is extended to keep the door locked, it draws only 0.18A in a holding mode down from 0.96A while the bolt is retracted. This design extends the life of the electric bolt.

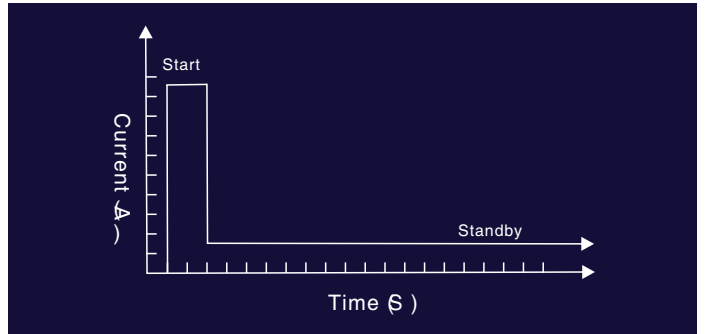

## 304 stainless steel solid bolt

With 304 stainless steel solid bolt, the electric bolt has 2000kg holding force. It is stronger and more durable under the harsh environment.

