

Small-size batteries



- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years

Application:

- Alarm System
- Cable Television
- Communication Equipment
- Emergency Power System
- Security System
- Medical Equipment
- UPS
- Power tools
- Control Equipment
- Toys

Construction:


- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy
- Safety valve Rubber
- TerminalCopper
- SeparatorFiber glass
- ElectrolyteSulfuric acid

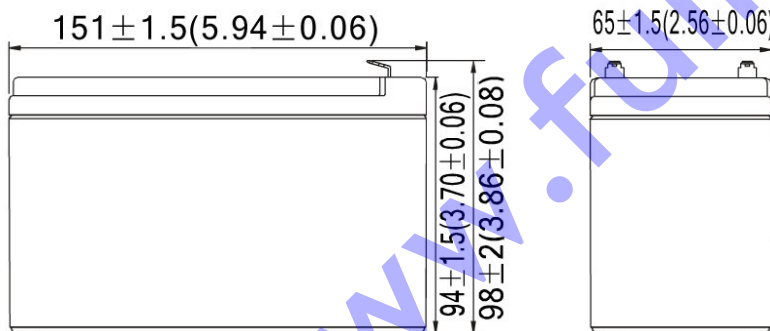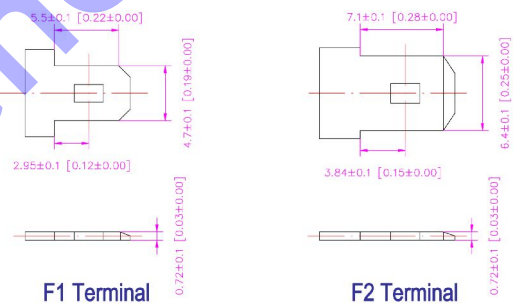


Specification:

Battery Model	FEP-129 12V 9.0AH			
Designed Floating Life	3~5 Years			
Capacity (25°C)	20HR(0.425A,10.5V)	10HR(0.822A,10.5V)	5HR(1.615A,10.5V)	1HR(5.517A,10.5V)
	8.50 AH	8.22 AH	8.08 AH	5.52 AH
Dimensions	Length	Width	Height	Total Height
	151 mm	65 mm	94 mm	98 mm
Approx. Weight	2.7Kg ±3%			
Internal Resistance	Full charged at 25°C : ≤24.50 mΩ			
Self Discharge	2% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25oC)	Cycle use		Float use	
	14.4-15.0V(-30mV/°C), max. Current: 2.70A		13.5-13.8V (-20mV/°C)	


Terminal Voltage (V) and Discharge Time

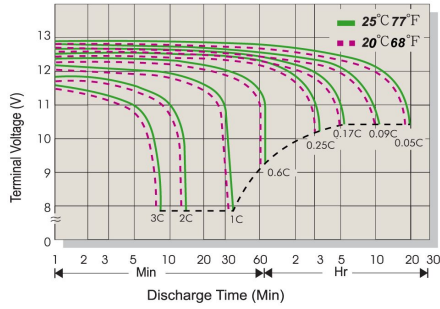


Capacity Retention Characteristic

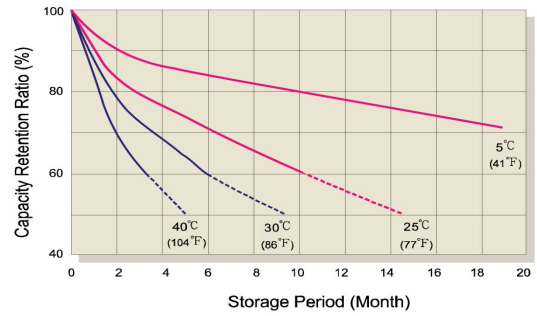


Battery Voltage and Charge Time for Standby Use

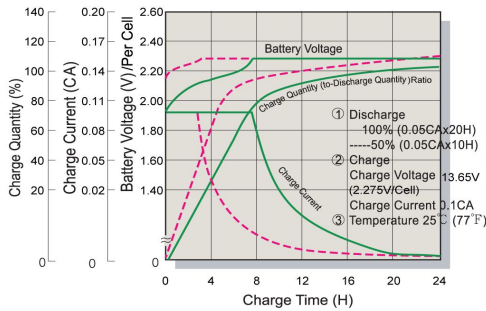


Battery Voltage and Charge Time for Cycle Use

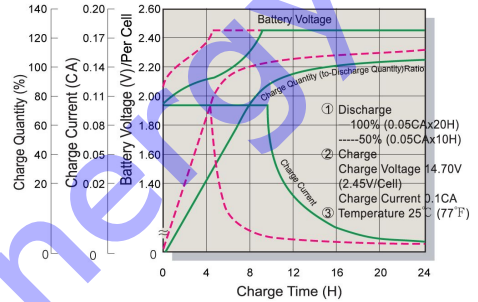

Tickle(or Float) Service Life

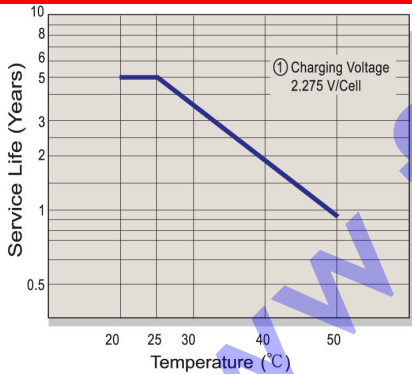

Cycle Service Life

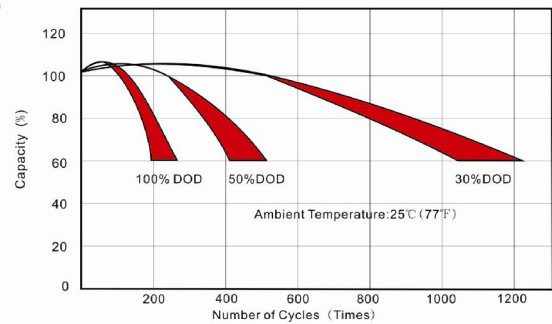

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.80V/Cell	27.65	19.19	15.76	9.45	5.415	2.906	2.398	1.832	1.585	1.266	0.807	0.417
1.75V/Cell	28.16	19.55	16.06	9.62	5.517	2.960	2.443	1.867	1.615	1.290	0.822	0.425
1.70V/Cell	29.01	20.14	16.54	9.91	5.682	3.049	2.517	1.923	1.663	1.328	0.847	0.438
1.67V/Cell	30.14	20.92	17.18	10.30	5.903	3.168	2.614	1.997	1.728	1.380	0.880	0.455
1.60V/Cell	31.83	22.09	18.15	10.88	6.234	3.345	2.761	2.109	1.825	1.457	0.929	0.480

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.80V/Cell	53.91	37.42	30.74	18.42	10.56	5.67	4.68	3.57	3.09	2.47	1.57	0.81
1.75V/Cell	54.92	38.12	31.32	18.77	10.76	5.77	4.76	3.64	3.15	2.51	1.60	0.83
1.70V/Cell	56.57	39.27	32.26	19.33	11.08	5.95	4.91	3.75	3.24	2.59	1.65	0.85
1.67V/Cell	58.76	40.79	33.51	20.08	11.51	6.18	5.10	3.90	3.37	2.69	1.72	0.89
1.60V/Cell	62.06	43.08	35.39	21.21	12.16	6.52	5.38	4.11	3.56	2.84	1.81	0.94